



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES

WASTE OIL
EQUIPMENTS

PRO ONE 15 - MA

FEATURES

- LONG-LASTING DIAPHRAGM
- BUILT-IN SILENCER
- HEAVY-DUTY WORKING CONDITIONS
- ROBUST DESIGN
- REDUCED AIR CONSUMPTION
- LOW NOISE LEVEL

The PRO ONE 15 is a PIUSI pump designed to offer maximum efficiency, long service life, and ease of use. Its new air distributor has been engineered for quick disassembly with direct access from the outside, making maintenance operations easier. It ensures high resistance, reliability, and remarkable durability. Equipped with an anti-stall system featuring an unbalanced valve, the pump optimizes air consumption, increasing operating efficiency and significantly reducing noise. Thanks to its Heavy Duty structure, the PRO ONE 15 is perfectly suited for demanding and prolonged applications, positively impacting maintenance and operating costs.

PERFORMANCE

UP TO

50 L/MIN

FLOW RATE

MAX

7 BAR

AIR PRESSURE

MAX CAPACITY

7 M

SELF PRIMING

MAX

Ø 2,5MM

PASSING SOLID



PRO ONE 15 - MA



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0808A00	5,9	13	292X178X285	11,4X7X11,2	-	1



FILTRATION



FLUID
MONITORING



TANK
MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

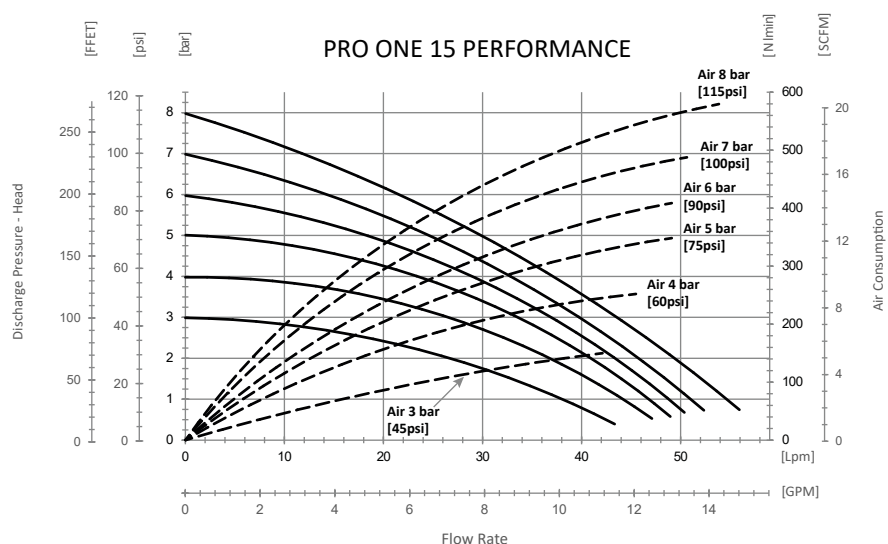

DIMENSIONS

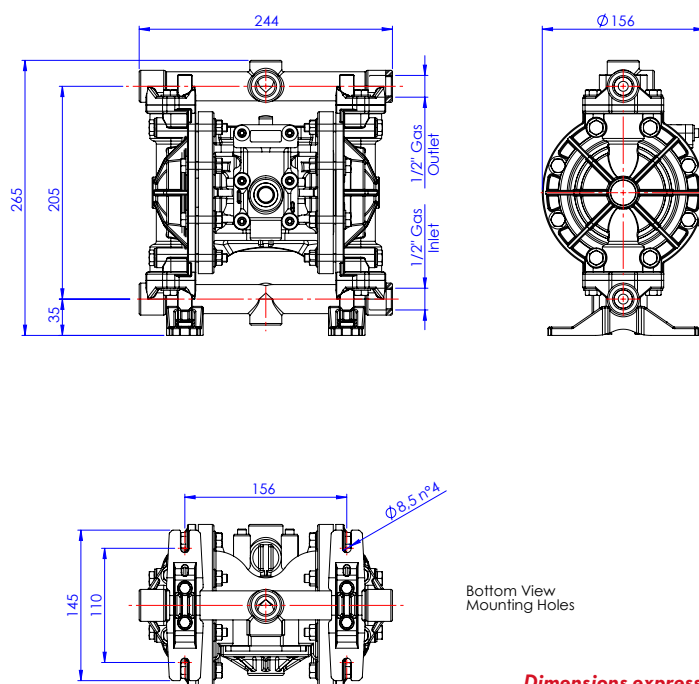

Dimensions expressed in millimeters

IN THE BOX

- PRO ONE 15 PUMP
- INSTRUCTION MANUAL

DETAILS



HEAVY DUTY MATERIALS



ALUMINIUM BODY



EASY TO FIT

MATERIALS IN CONTACT WITH FLUIDS

- BODY: ALUMINIUM
- DIAPHRAGMS: NBR

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	PUMP BODY	IN / OUT	FLOW RATE	DIAPHRAGM	INTAKE / DELIVERY CONNECTION	AIR CON-NECTION	MAX SELF-PRIMING CAPACITY	MAX HEAD	MAX AIR SUP-PLY PRESSURE	MAX Ø OF PASSING SOLID
					L/MIN				M	M	BAR	MM
FO0808A00	(EX) PRO ONE 15 - MA 50 L/MIN		ALLUMINIUM	1/2" G	50	NBR	G 1/2" F	G 3/8" F	7	70	7	2,5