



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES

WASTE OIL
EQUIPMENTS

VACUBOX

FEATURES

- AUTOMATIC OPERATION
- COMPRESSED AIR NOT REQUIRED
- NO EMPTYING NEEDED
- IDEAL FOR CENTRALIZED SYSTEMS
- ACOUSTIC SIGNAL
- VACUUM INDICATOR
- OPERATOR NOT REQUIRED
- ASPIRATION FROM DEEPSTICK BONNET
- HIGH SUCTION CAPACITY

The PIUSI VACUBOX is the perfect solution to automatically drain oil from a tank without the need of compressed air. Inside this all inclusive item there is an electric gear pump, a pressure switch and an electronic board that automatically switches off the pump once the tank is empty.

PERFORMANCE

UP TO

10 L/MIN

TANK CAPACITY


**AC
VOLTAGE**

POWER

BELOW

65DB

NOISE LEVEL*

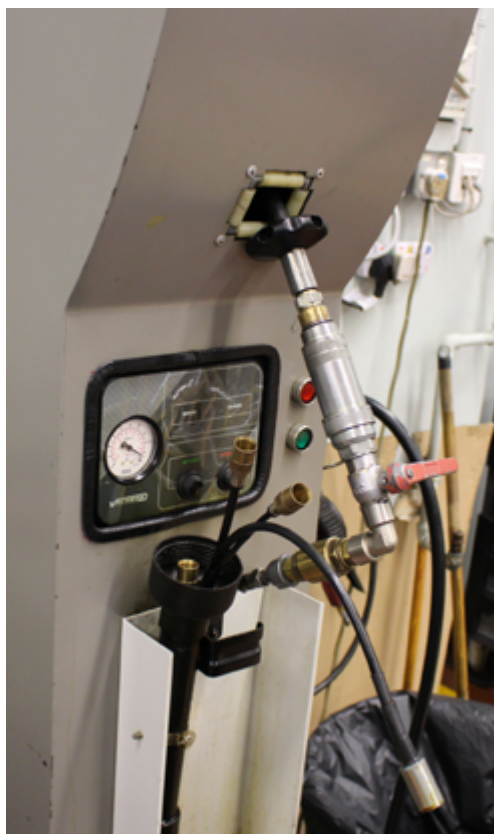**VACUBOX**

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0500B00	10	22	295X295X325	11,6X11,6X12,8		1



FILTRATION



FLUID
MONITORING



TANK
MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

FUNCTIONING

FULLY AUTOMATIC!




Suction directly from
car and directly driven
into waste oil
storage tank.




DIMENSIONS

VACUBOX FRONT

266



VACUBOX SIDE "A"



246

VACUBOX SIDE "B"



236

Dimensions expressed in millimeters

IN THE BOX

- VACUBOX
- INSTRUCTION MANUAL

DETAILS



COMPACT DESIGN



AUTOMATIC STOPS

MATERIALS

- PUMP BODY: CAST IRON
- PUMP GEARS: BRONZE
- SHAFT: STEEL

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			INLET
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.	BSP
FO0500B00	VACUBOX		1-10	0,25 - 2,5	230/50	350	2	1/2"

AVAILABLE AT 110-120 V / 60 HZ

ELECTRIC OIL DRAINERS